



M300

CONT 275 kVA



THREE-PHASE SYNCHRONOUS GENERATOR

Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature	40 °C	Method of Cooling	Air cooling
Temperature Rise	125 °C	Direction of Rotation	Clockwise
Insulation Class	H	Maximum Over-speed	2250r/min
Power Factor	0.8	Degree of Protection / Enclosure	IP23
Excitation	Brushless	Altitude	1000m
Winding Pitch	2/3	Stator winding	DLL
Pole	4	Number of Terminal	12
Duty	S1- Continuous	Rotor	With damping cage
Waveform	TIF<50		THF<2%
Waveform distortion	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N		
Radio interference	Noload<1.5%,Non-distorting balanced linear load<5%		
AVR MODEL AVR	Standard	Selection	
	AS440	KRS440	PMG
Voltage Regulation - in steady state condition	±1.0	±1.0	±0.5 ±0.5
Short Circuit Current Capacity	Control does not sustain a short circuit current		1250A

Electrical Characteristic

Frequency	Hz	50				60			
Voltage (series star) Y	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage (parallel star) YY	V	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
Voltage (series delta) Δ	V	220	230	240	254	240	254	266	277
Rated power at Class H (125 °C) temperature rise	kVA	275	275	275	N/A	315	330	330	340
	kW	220.0	220.0	220.0	N/A	252.0	264.0	264.0	272.0
Efficiency at Class H (P.F.=0.8)	4/4%	92.7	93	93.1	N/A	92.8	93	93	93.1
	3/4%	93.8	94	94	N/A	93.8	94	94	94
	2/4%	94.2	94.2	94.1	N/A	94	94	94	94
Efficiency at Class H (P.F.=1.0)	4/4%	94.2	94.5	94.7	N/A	94.3	94.4	94.5	94.7
	3/4%	95.2	95.3	95.4	N/A	95.1	95.2	95.2	95.2
	2/4%	95.5	95.5	95.4	N/A	95.2	95.3	95.3	95.3

Reactances (%) at Class H

Direct axis synchronous reactance unsaturated	Xd	3.155	2.845	2.645	N/A	3.685	3.44	3.29	3.025
Direct axis transient reactance saturated	X'd	0.2	0.18	0.17	N/A	0.23	0.22	0.21	0.19
Direct axis subtransient reactance saturated	X''d	0.14	0.13	0.12	N/A	0.155	0.145	0.14	0.125
Quadrature axis synchronous reactance unsaturated	Xq	2.685	2.42	2.25	N/A	3.17	2.96	2.83	2.6
Quadrature axis subtransient reactance saturated	X''q	0.39	0.36	0.33	N/A	0.415	0.39	0.375	0.345
Leakage reactance	X1	0.085	0.075	0.07	N/A	0.095	0.09	0.085	0.075
Negative sequence reactance saturated	X2	0.265	0.245	0.225	N/A	0.29	0.275	0.26	0.24
Zero sequence reactance unsaturated	X0	0.1	0.09	0.08	N/A	0.1	0.09	0.09	0.08
Short-circuit ratio	Kcc	0.3170	0.3515	0.3781	N/A	0.2714	0.2907	0.3040	0.3306

Short-circuit transient time constant (sec.)	T'd	0.08							
Subtransient time constant (sec.)	T''d	0.019							
Open circuit time constant (sec.)	T'do	1.7							
Armature time constant (sec.)	Ta	0.018							
Stator Winding Resistance (20°C)	ohm	0.0148							
Rotor Winding Resistance (20°C)	ohm	0.943							
Exciter Stator Resistance (20°C)	ohm	18							
Exciter Rotor Phase resistance	ohm	0.068							
No load excitation current	io (A)	0.5	0.52	0.6	0.6	0.5	0.51	0.6	0.6
Full load excitation current	ic(A)	2.1	2.1	2.2	2.2	2.1	2.1	2.2	2.2
Cooling air requirement	m ³ /sec	0.8m ³ /s 1700cfm				0.99m ³ /s 2100cfm			

Mechanical Characteristic

Configuration	Single Bearing	Double Bearing
Type of Construction	B2-SAE	IM B34
Total Weight - kgs	830	820
Weight wound stator - kgs	385	385
Weight wound rotor - kgs	325	302
Inertia (J) [kgm ²]	3.6282kgm ²	3.4294kgm ²
Drive end bearing / Lubrication		BALL.6317-2RS(ISO)
Non-drive end bearing / Lubrication	BALL.6314-2RS(ISO)	BALL.6314-2RS(ISO)
Packing crate size (cm)	122X70X104	133X70X104


Winding 311 / 0.8 Power Factor

RATINGS

Class - Temp Rise		Cont. F - 105/40° C				Cont. H - 125/40° C				Standby - 150/40° C				Standby - 163/27° C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	253	253	253	N/A	275	275	275	N/A	297	297	297	N/A	305.25	305.3	305.3	N/A
	kW	202.4	202.4	202.4	N/A	220	220	220	N/A	237.6	237.6	237.6	N/A	244.2	244.2	244.2	N/A
	Efficiency (%)	93.1	93.4	93.5	N/A	92.6	93	93.1	N/A	92.2	92.7	92.8	N/A	92.1	92.5	92.6	N/A
	kW Input	217	217	216	N/A	238	237	236	N/A	258	256	256	N/A	265	264	264	N/A

60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Series Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	270.5	290.7	303.6	303.6	294	316	330	330	311.4	334	331.4	349.8	323.1	346	363	363
	kW	216.4	232.6	242.9	242.9	235.2	252.8	264	264	249.1	267.2	265.1	279.8	258.48	276.8	290.4	290.4
	Efficiency (%)	93.2	93.2	93.4	93.5	92.8	93	93.1	93.2	92.4	92.5	92.6	93	92.4	92.5	92.5	92.8
	kW Input	232	250	260	260	253	272	284	283	270	289	286	301	280	299	314	313




DIMENSIONS

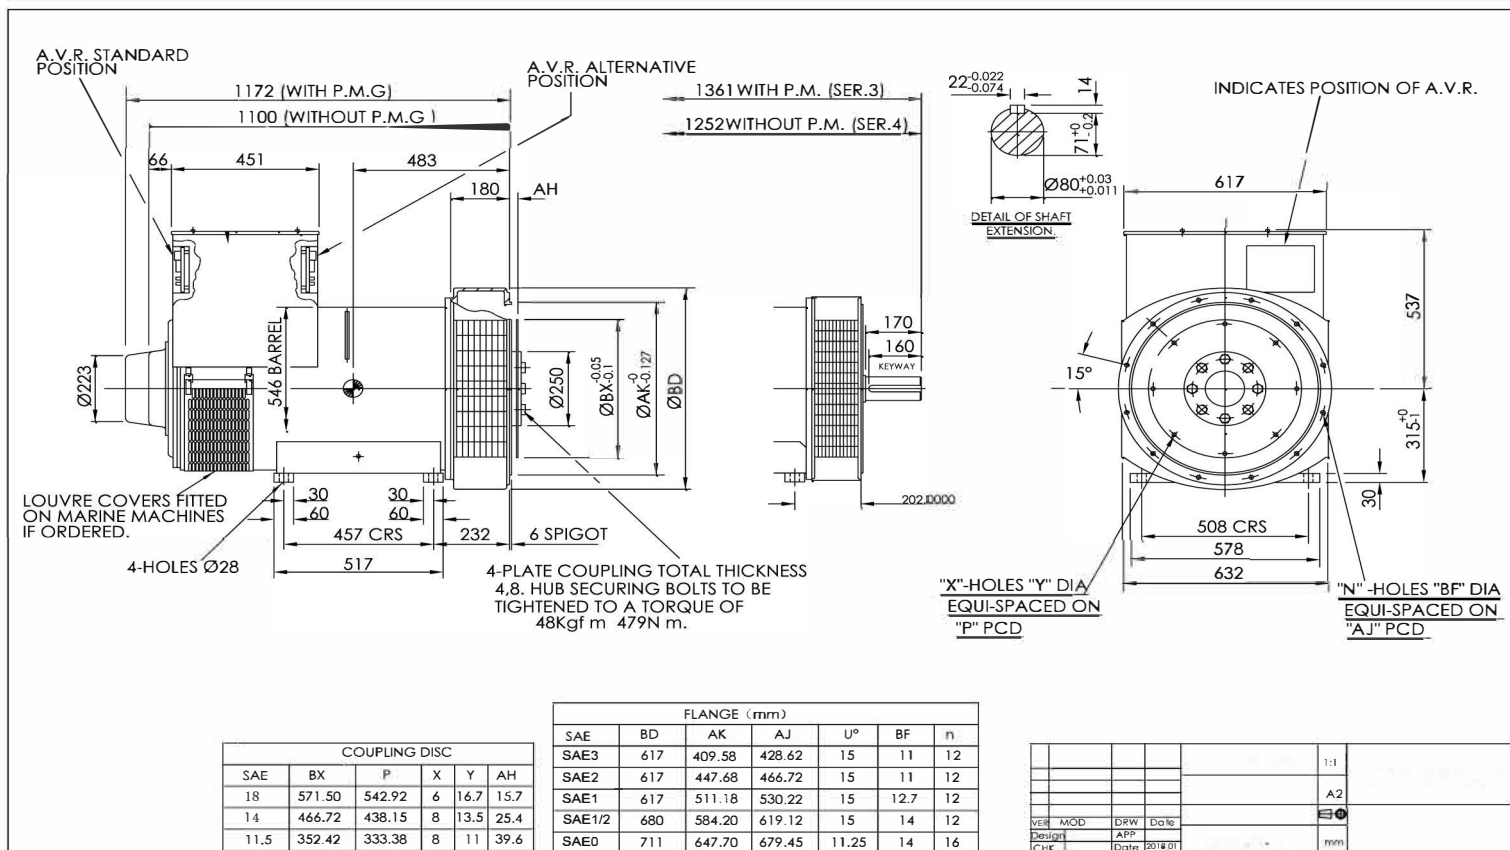

**50
Hz**

Winding 311





THREE PHASE EFFICIENCY CURVES

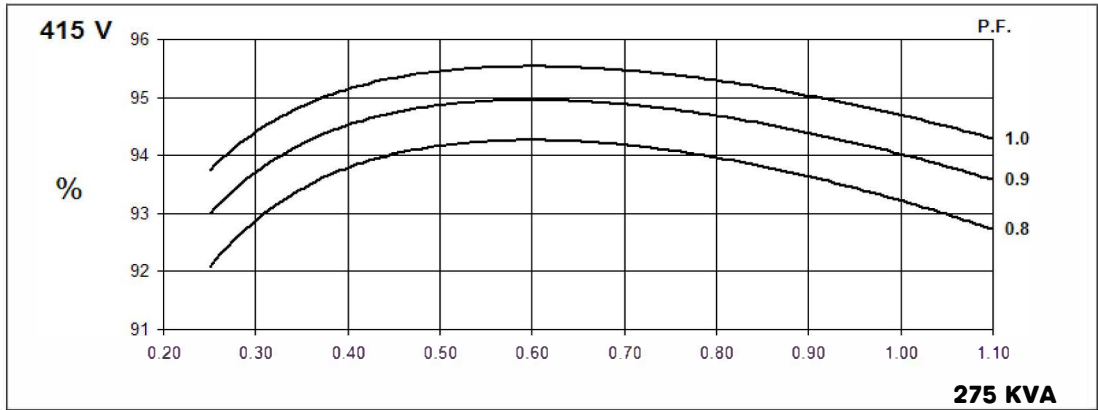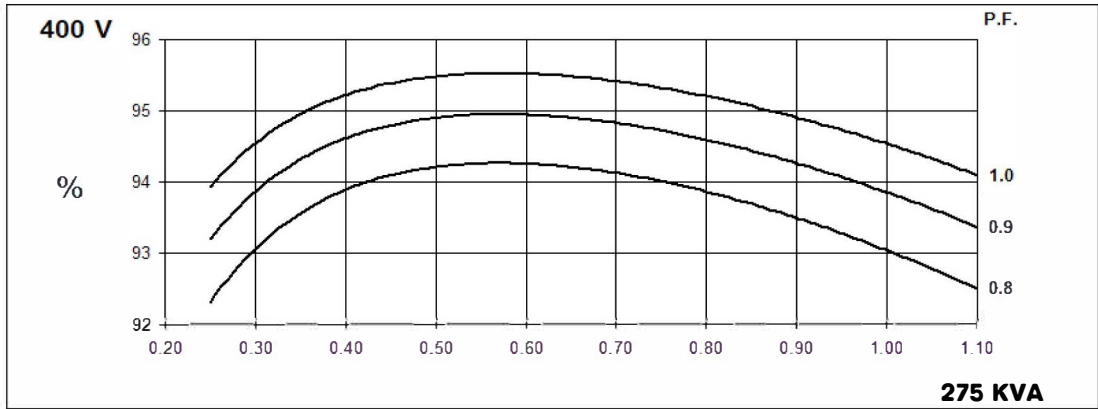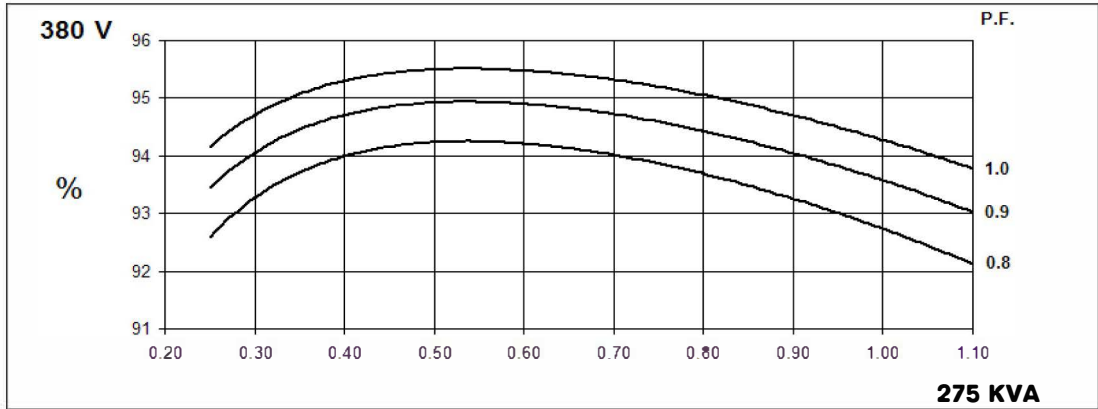

**60
Hz**


Winding 311

THREE PHASE EFFICIENCY CURVES

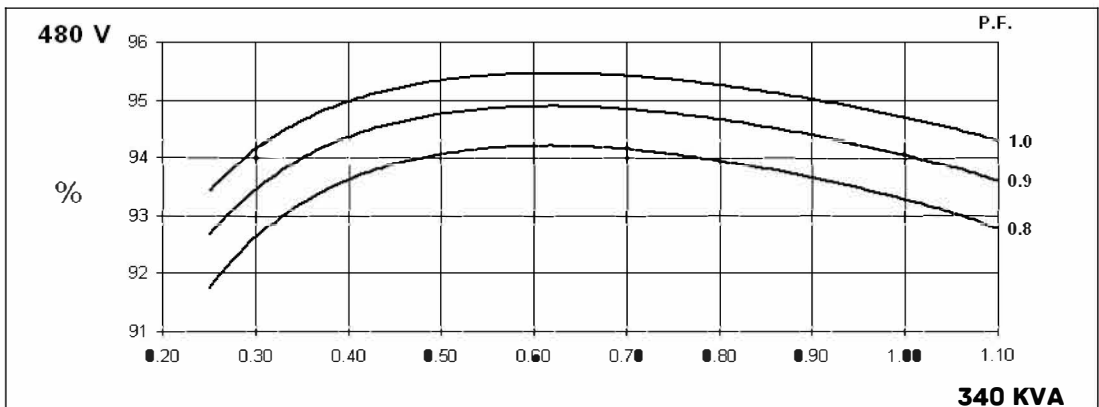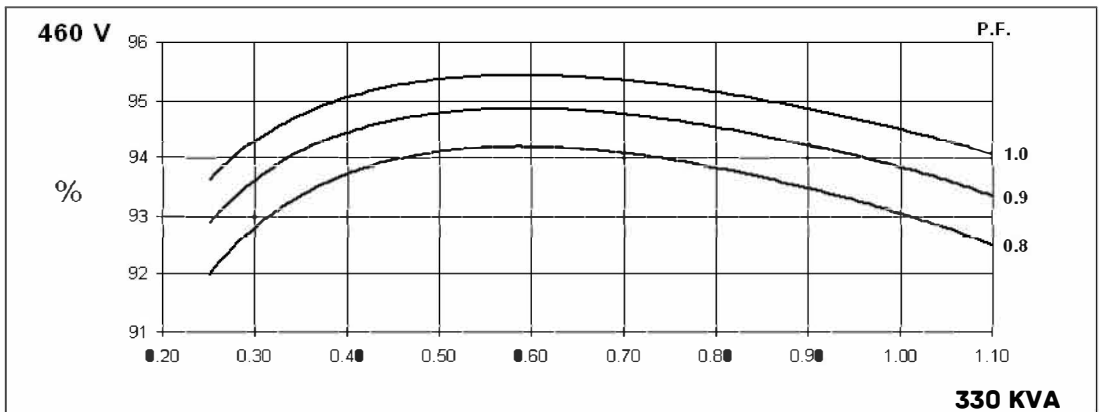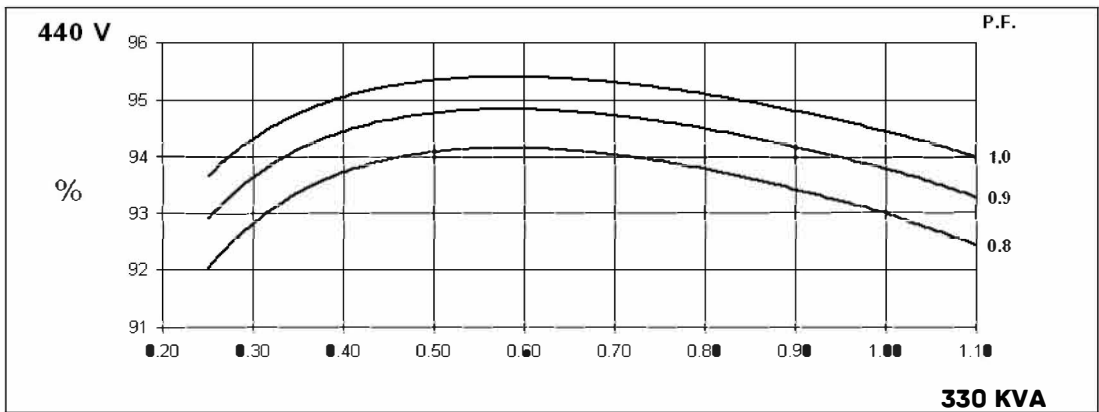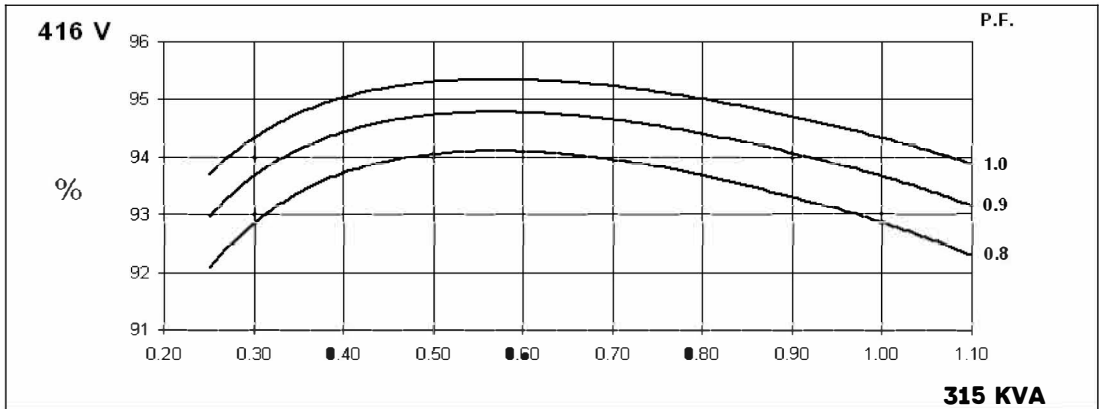


**Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed
Based on star (wye) connection.**

**50
Hz**

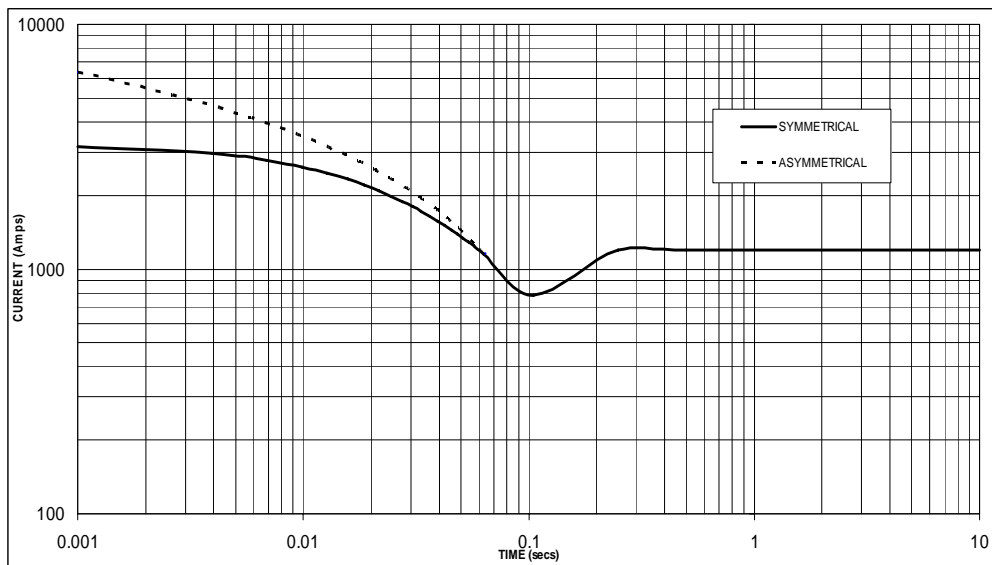

Sustained Short Circuit = 1,250 Amps

**60
Hz**

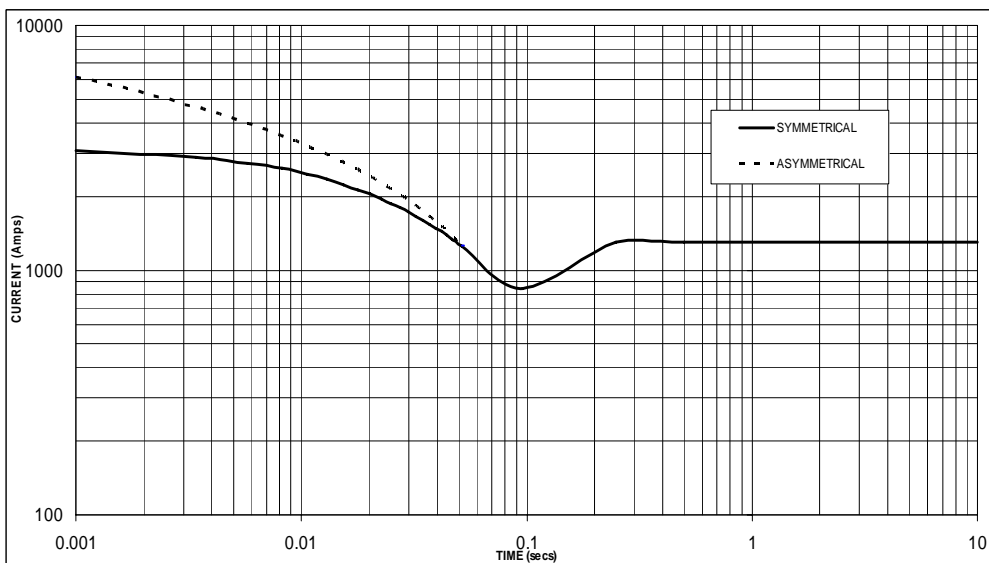

Sustained Short Circuit = 1,350 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.05	440v	X 1.06
415v	X 1.09	460v	X 1.10
440v	X 1.16	480v	X 1.15

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :


	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :

REV 0.01
 2018.01

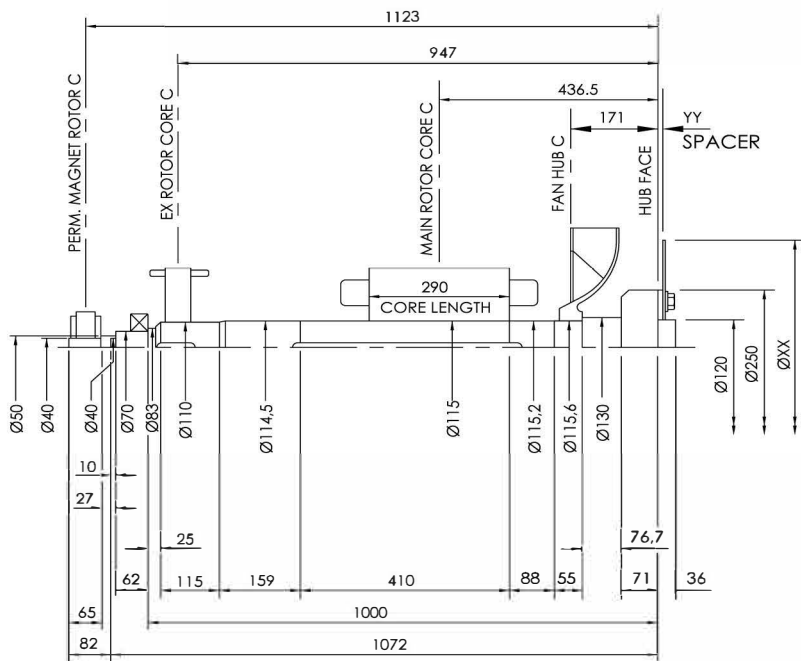

COMPONENT	Wt kg	J kgm ²
EX. ROTOR	31,290	0,5100
MAIN ROTOR	178.16	2,969
FAN	9,910	0,2630
SHAFT	87,191	0,1450
HUB	18,507	0,1779
TOTAL	325.06	3.6282
PERM. MAG.	5.215	0,0122
TOTAL	330.28	3.64

COUPLING SAE No	COUPLING DIMEN's		COUPLING ASSEMBLY WEIGHT kg	COUPLING STIFFNESS 4-PLATES kgcm/rad	COUPLING DISC WR ² kg m ²
	XX	YY			
11.5	352	23.8	12.08	755.8×10 ⁶	0.055
14	467	9.5	11.66	622.8×10 ⁶	0.172
18	572	0.0	12.07	570.0×10 ⁶	0.386

VER	MOD	DRW	DATE	1:1
Design		APP		mm
CHK		Date	2018.01	

