



M360

CONT 325 kVA



THREE-PHASE SYNCHRONOUS GENERATOR

Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature	40 °C	Method of Cooling	Air cooling
Temperature Rise	125 °C	Direction of Rotation	Clockwise
Insulation Class	H	Maximum Over-speed	2250r/min
Power Factor	0.8	Degree of Protection / Enclosure	IP23
Excitation	Brushless	Altitude	1000m
Winding Pitch	2/3	Stator winding	DLL
Pole	4	Number of Terminal	12
Duty	S1- Continuous	Rotor	With damping cage
Waveform	TIF<50		THF<2%
Waveform distortion	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N		
Radio interference	Noload<1.5%,Non-distorting balanced linear load<5%		
AVR MODEL AVR	Standard	Selection	
	AS440	KRS440	PMG
Voltage Regulation - in steady state condition	±1.0	±1.0	±0.5 ±0.5
Short Circuit Current Capacity	Control does not sustain a short circuit current		1450A

Electrical Characteristic

Frequency	Hz	50				60			
Voltage (series star) Y	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage (parallel star) YY	V	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
Voltage (series delta) Δ	V	220	230	240	254	240	254	266	277
Rated power at Class H (125 °C) temperature rise	kVA	325	325	325	N/A	370	390	390	405
	kW	260.0	260.0	260.0	N/A	296.0	312.0	312.0	324.0
Efficiency at Class H (P.F.=0.8)	4/4%	93.2	93.4	93.6	N/A	93.3	93.4	93.4	93.7
	3/4%	94.2	94.3	94.3	N/A	94.3	94.3	94.4	94.4
	2/4%	94.3	94.5	94.4	N/A	94.4	94.4	94.4	0.3
Efficiency at Class H (P.F.=1.0)	4/4%	94.6	94.8	95	N/A	94.8	94.8	94.9	95
	3/4%	95.5	95.7	95.6	N/A	95.5	95.6	95.6	95.7
	2/4%	95.6	95.8	95.7	N/A	95.7	95.7	95.7	95.7

Reactances (%) at Class H

Direct axis synchronous reactance unsaturated	Xd	3.01	2.71	2.52	N/A	3.47	3.26	3.12	2.87
Direct axis transient reactance saturated	X'd	0.2	0.18	0.17	N/A	0.21	0.2	0.19	0.17
Direct axis subtransient reactance saturated	X''d	0.14	0.13	0.12	N/A	0.15	0.14	0.13	0.12
Quadrature axis synchronous reactance unsaturated	Xq	2.58	2.33	2.16	N/A	2.92	2.74	2.63	2.41
Quadrature axis subtransient reactance saturated	X''q	0.36	0.32	0.3	N/A	0.41	0.38	0.37	0.34
Leakage reactance	X1	0.07	0.06	0.06	N/A	0.08	0.08	0.07	0.07
Negative sequence reactance saturated	X2	0.24	0.22	0.2	N/A	0.28	0.26	0.25	0.23
Zero sequence reactance unsaturated	X0	0.1	0.09	0.08	N/A	0.1	0.09	0.09	0.08
Short-circuit ratio	Kcc	0.3322	0.3690	0.3968	N/A	0.2882	0.3067	0.3205	0.3484

Short-circuit transient time constant (sec.)	T'd	0.08							
Subtransient time constant (sec.)	T''d	0.019							
Open circuit time constant (sec.)	T'do	1.7							
Armature time constant (sec.)	Ta	0.018							
Stator Winding Resistance (20°C)	ohm	0.0094							
Rotor Winding Resistance (20°C)	ohm	1.17							
Exciter Stator Resistance (20°C)	ohm	18							
Exciter Rotor Phase resistance	ohm	0.068							
No load excitation current	io (A)	0.5	0.52	0.6	0.6	0.5	0.51	0.6	0.6
Full load excitation current	ic(A)	2.1	2.1	2.2	2.2	2.1	2.1	2.2	2.2
Cooling air requirement	m ³ /sec	0.8m ³ /s 1700cfm				0.99m ³ /s 2100cfm			

Mechanical Characteristic


Configuration	Single Bearing	Double Bearing
Type of Construction	B2-SAE	IM B34
Total Weight - kgs	920	910
Weight wound stator - kgs	440	440
Weight wound rotor - kgs	387	365
Inertia (J) [kgm ²]	4.6331kgm ²	4.4343kgm ²
Drive end bearing / Lubrication		BALL.6317-2RS(ISO)
Non-drive end bearing / Lubrication	BALL.6314-2RS(ISO)	BALL.6314-2RS(ISO)
Packing crate size (cm)	122X70X104	133X70X104

Winding 311 / 0.8 Power Factor

RATINGS

Class - Temp Rise		Cont. F - 105/40° C				Cont. H - 125/40° C				Standby - 150/40° C				Standby - 163/27° C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	299	299	299	N/A	325	325	325	N/A	351	351	351	N/A	360.75	360.8	360.8	N/A
	kW	239.2	239.2	239.2	N/A	260	260	260	N/A	280.8	280.8	280.8	N/A	288.6	288.6	288.6	N/A
	Efficiency (%)	93.6	93.8	94	N/A	93.2	93.5	93.6	N/A	92.9	93.2	93.4	93.6	92.7	92.7	93.2	N/A
	kW Input	256	255	254	N/A	279	278	278	N/A	302	301	301	N/A	311	311	310	N/A
60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Series Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	329.4	345	345	358.8	358	375	375	390	379.5	393.75	393.8	413.4	393.8	412.5	412.5	429
	kW	263.5	276	276	287	286.4	300	300	312	303.6	315	315	330.7	315.04	330	330	343.2
	Efficiency (%)	93.8	93.8	93.9	94	93.4	93.5	93.5	93.7	93.1	93.2	93.2	93.5	92.9	93	93.1	93.3
	kW Input	281	294	294	305	307	321	321	333	326	338	338	354	339	355	354	368




DIMENSIONS

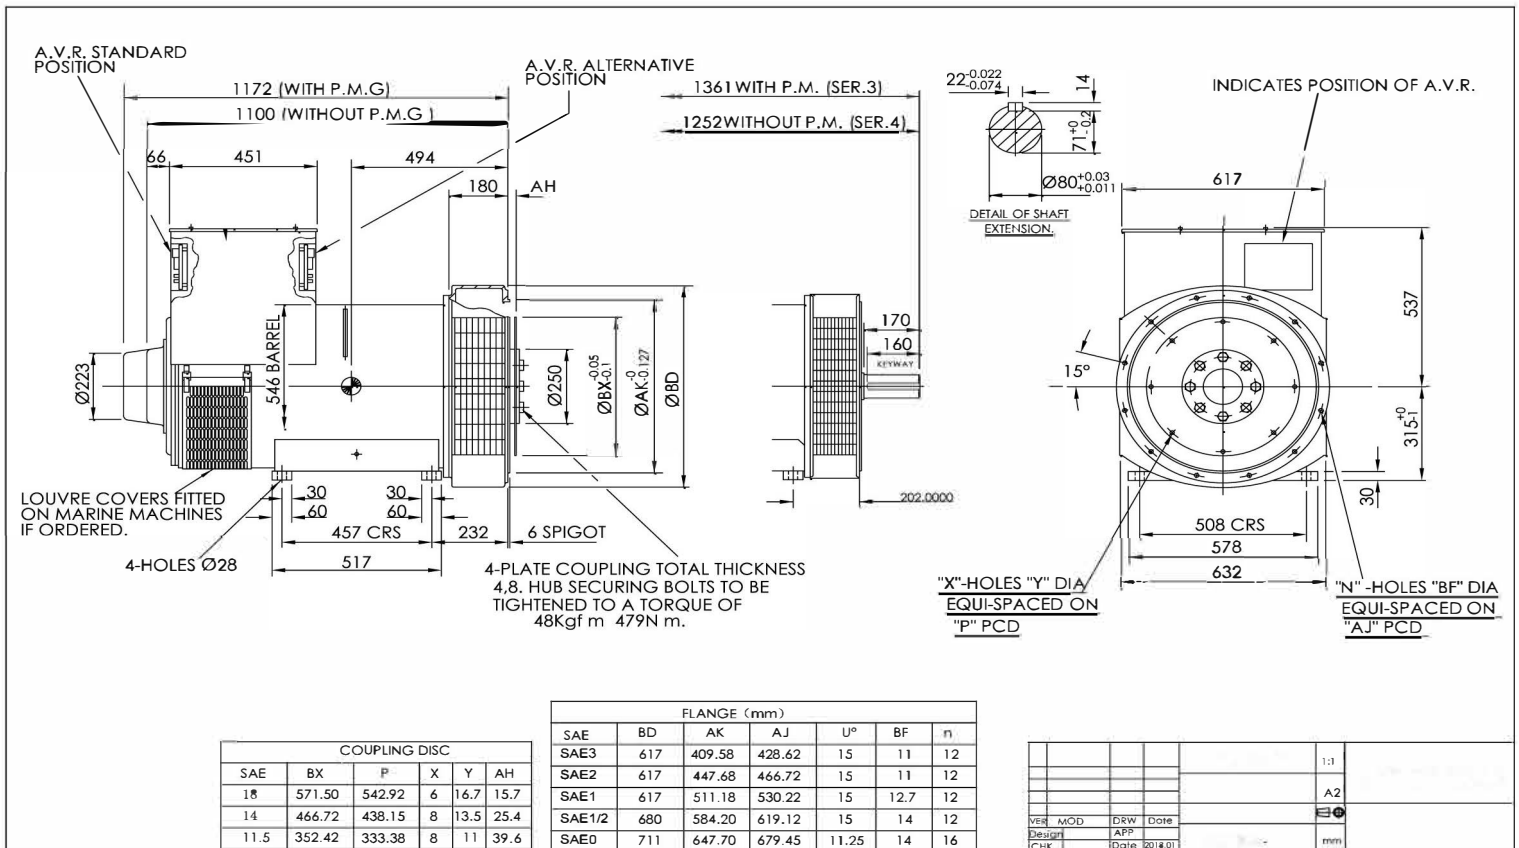

**50
Hz**

Winding 311





THREE PHASE EFFICIENCY CURVES

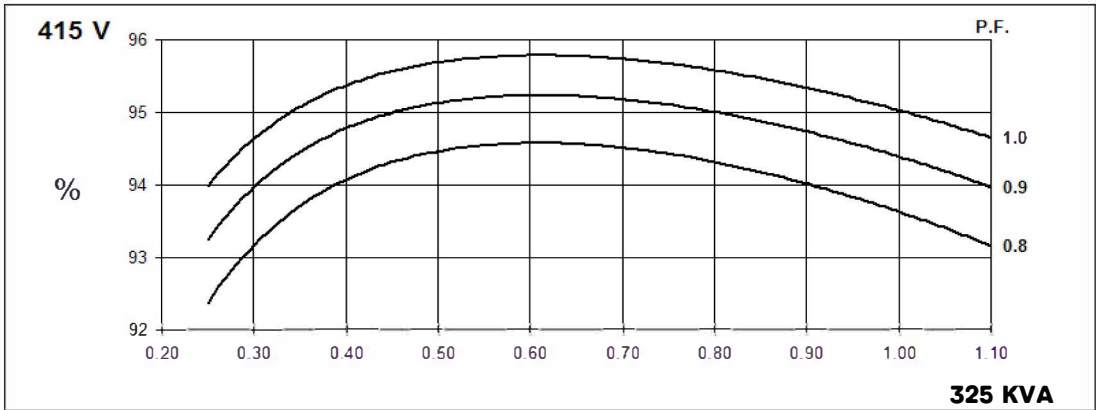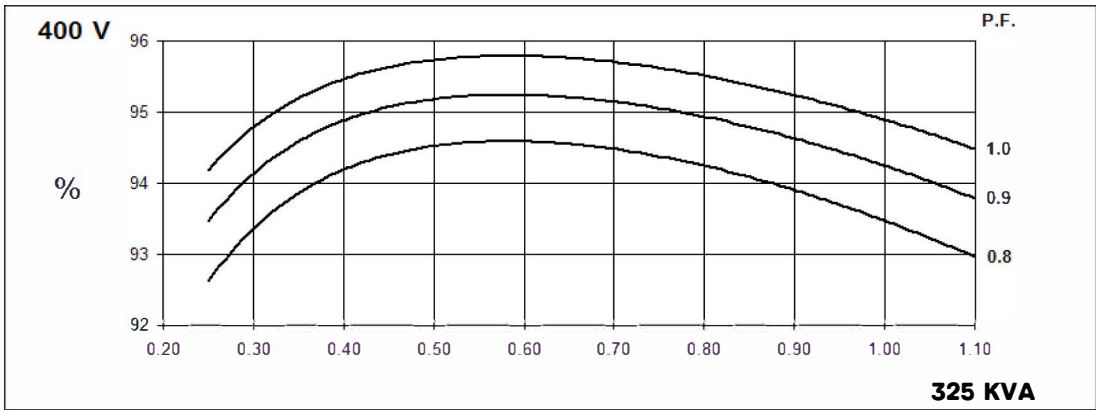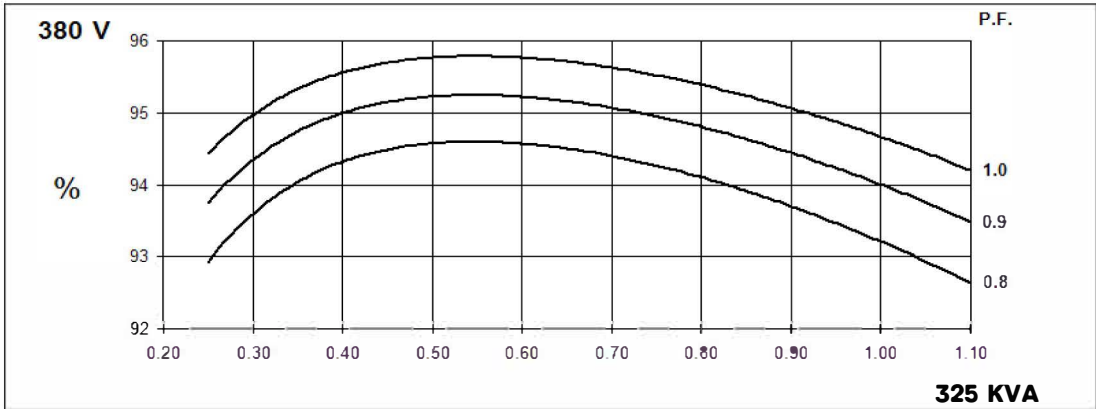

**60
Hz**


Winding 311

THREE PHASE EFFICIENCY CURVES

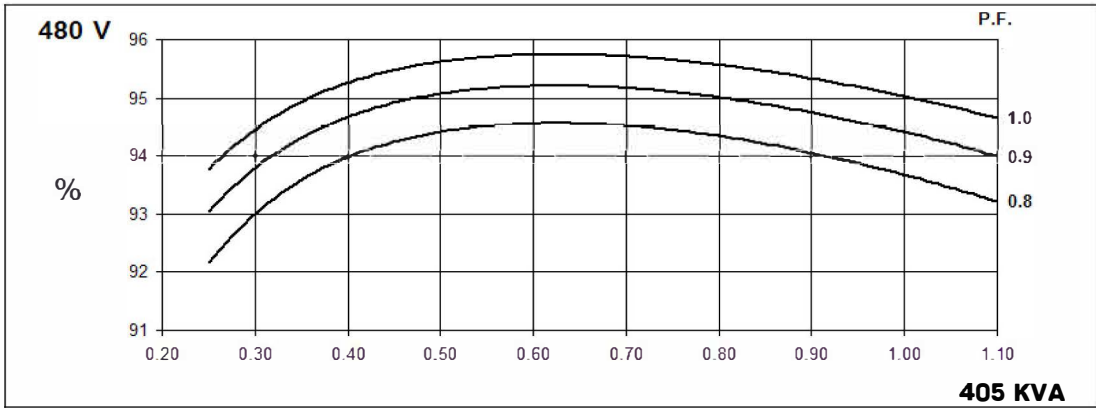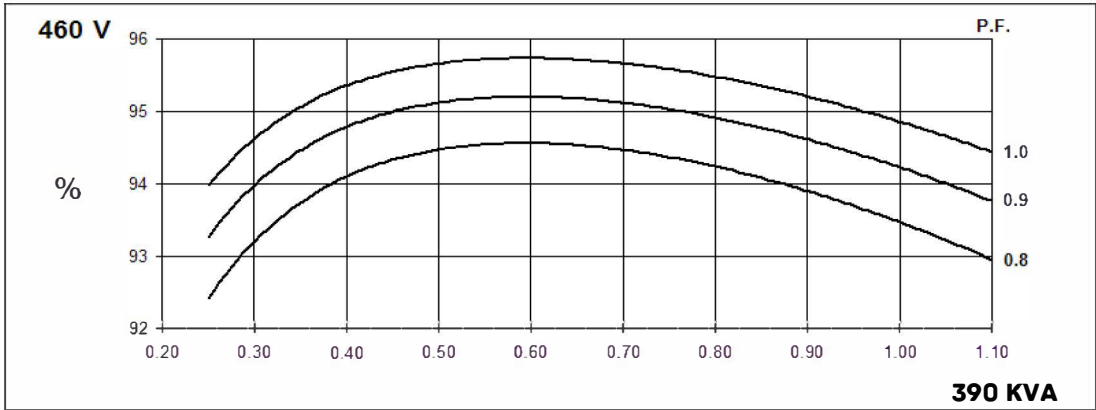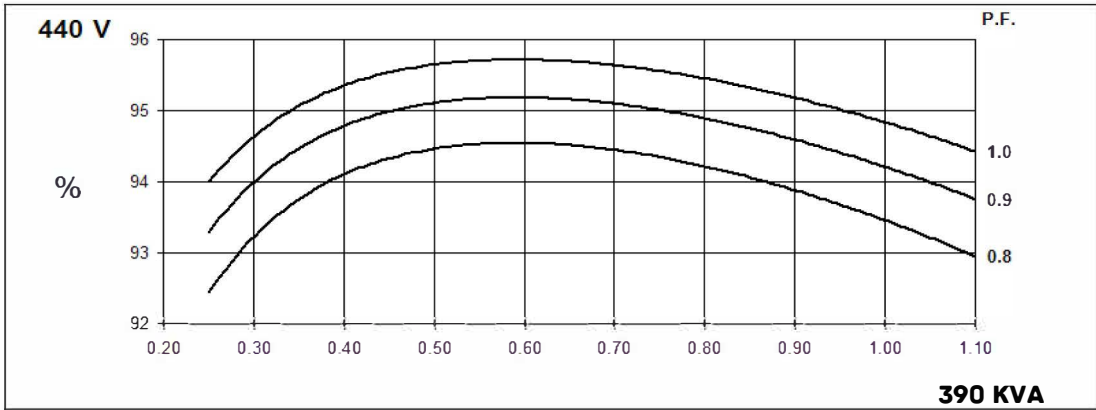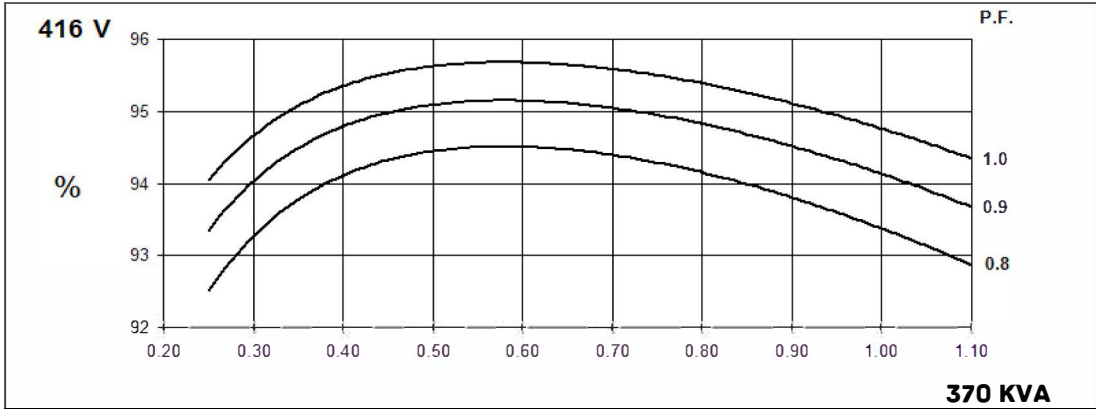


**Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed
Based on star (wye) connection.**

**50
Hz**

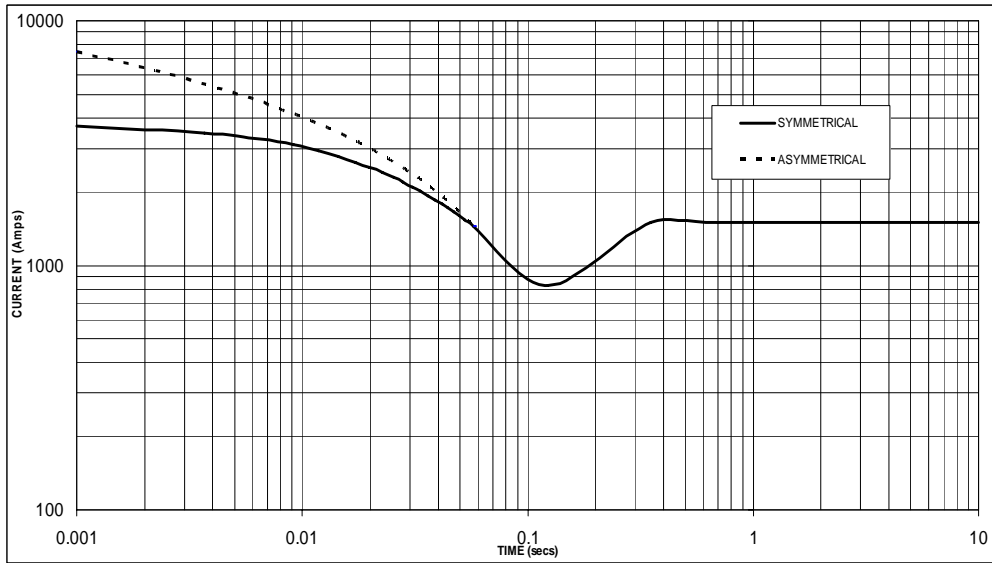

Sustained Short Circuit = 1,450 Amps

**60
Hz**

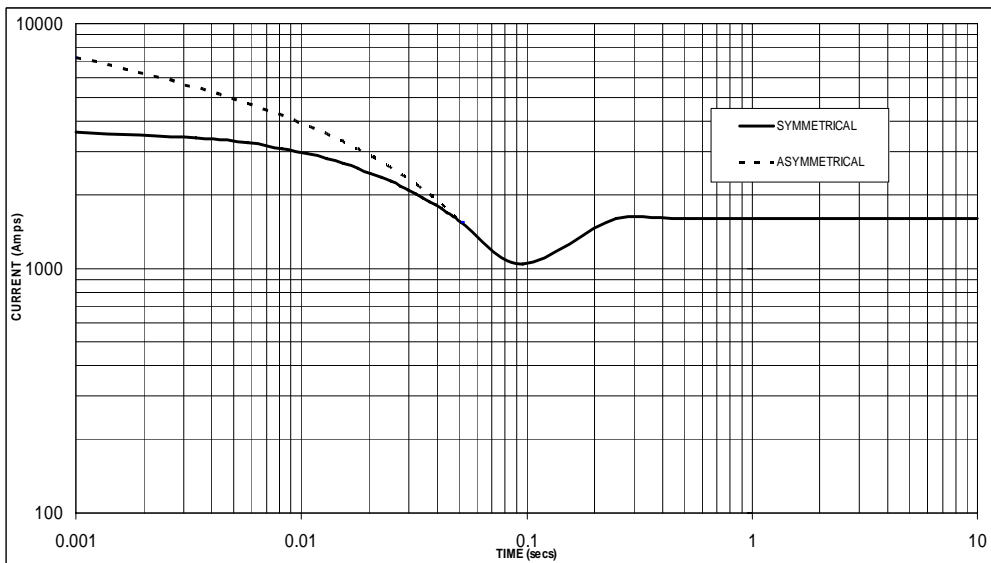

Sustained Short Circuit = 1,550 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.05	440v	X 1.06
415v	X 1.10	460v	X 1.10
440v	X 1.16	480v	X 1.15

The sustained current value is constant irrespective of voltage level

Note 2


The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :

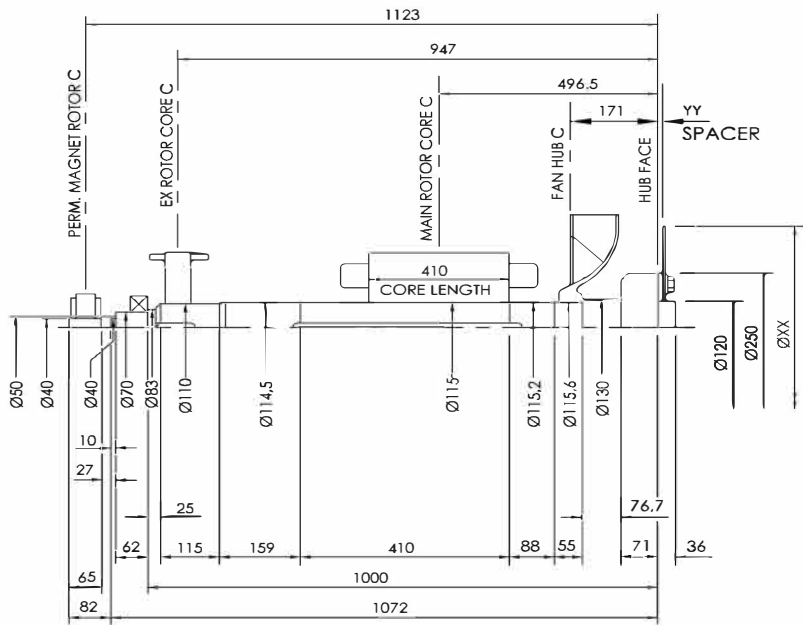

COMPONENT	Wt kg	J kgm ²
EX. ROTOR	31,290	0,5100
MAIN ROTOR	248.15	3.525
FAN	9,910	0,2630
SHAFT	87,191	0,1450
HUB	18,507	0,1779
TOTAL	395.048	4.6209
PERM. MAG.	5.215	0,0122
TOTAL	400.263	4.6331

COUPLING SAE No	COUPLING DIMEN's		COUPLING ASSEMBLY WEIGHT kg	COUPLING STIFFNESS 4-PLATES kgcm/rad	COUPLING DISC WR ² kg m ²
	XX	YY			
11,5	352	23,8	12,08	755,8×10 ⁵	0,055
14	467	9,5	11,66	622,8×10 ⁵	0,172
18	572	0,0	12,07	570,0×10 ⁵	0,386

VER	MOD	DRW	Date		1:1
Design	APP				⊕
CHK	Date	2018.01			mm

