



M1385

CONT 1250 kVA



THREE-PHASE SYNCHRONOUS GENERATOR

Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature 环境温度	40 °C	Method of Cooling 冷却方式	Air cooling 风冷
Temperature Rise 温升	125 °C	Direction of Rotation 旋转方向	Clockwise 顺时针
Insulation Class 绝缘等级	H	Maximum Over-speed 最高转速	2250r/min
Power Factor 功率因数	0.8	Degree of Protection / Enclosure 防护等级	IP23
Excitation 励磁方式	Brushless 无刷	Altitude 海拔	1000m
Winding Pitch 绕组节距	2/3	Stator winding 定子绕组	双层叠绕绕组 DLL
Pole 极数	4	Number of Terminal 终端数量	6
Duty 工作制	S1- Continuous	Rotor 转子	With damping cage 带阻尼
Waveform 电话干扰因数	TIF<50		THF<2%
Waveform distortion 波形畸变率	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N		
Radio interference 无线电干扰	Noload<1.5%,Non-distorting balanced linear load<5%		
AVR MODEL AVR型号	Standard 标配	Selection 选配	
	MX341B	MX321	PMG MX341B MX321
Voltage Regulation - in steady state condition 电压调节	±0.5	±0.5	±0.5 ±0.5
Short Circuit Current Capacity 短路电流容量	5400A		

Electrical Characteristic

	Hz	50				60			
		380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage (series star)电压 Y	V	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Voltage (parallel star)电压 YY	V	220	230	240	254	240	254	266	277
Voltage (series delta)电压 Δ	V	1190	1250	1250	1135	1310	1386	1449	1513
Rated power at Class H (125 °C) temperature rise 额定功率在H(125 °C)温升	kVA	952	1000	1000	908	1048	1108.8	1159.2	1210.4
Efficiency at Class H (P.F.=0.8)绝缘等级H (P.F.=0.8)效率	4/4%	94.9	94.9	95	95.1	94.9	95	95	95
	3/4%	95.3	95.3	95.3	95.2	95.2	95.2	95.2	95.2
	2/4%	95.1	95.1	95	94.7	95	95	95	94.9
Efficiency at Class H (P.F.=1.0)绝缘等级H (P.F.=1.0)效率	4/4%	96	96	96	96.1	96	96	96	96
	3/4%	96.3	96.3	96.4	96.2	96.2	96.2	96.2	96.2
	2/4%	96.2	96.2	96.1	95.9	96	96	96	96
Reactances (%) at Class H 绝缘等级H考核时的电抗									
Direct axis synchronous reactance unsaturated 直轴同步电抗	X _d	2.16	2.05	1.9	1.54	2.47	2.33	2.23	2.14
Direct axis transient reactance saturated 直轴瞬态电抗	X' _d	0.12	0.11	0.1	0.08	0.13	0.13	0.12	0.12
Direct axis subtransient reactance saturated 直轴瞬变电抗	X'' _d	0.09	0.08	0.08	0.06	0.1	0.09	0.09	0.08
Quadrature axis synchronous reactance unsaturated 交轴同步电抗	X _q	1.79	1.7	1.58	1.28	2.04	1.93	1.85	1.77
Quadrature axis subtransient reactance saturated 交轴起始瞬态电抗	X'' _q	0.21	0.2	0.18	0.15	0.23	0.22	0.21	0.2
Leakage reactance 漏抗	X _l	0.07	0.06	0.06	0.05	0.07	0.07	0.07	0.07
Negative sequence reactance saturated 负序电抗饱和	X ₂	0.15	0.14	0.13	0.11	0.17	0.16	0.15	0.15
Zero sequence reactance unsaturated 零序电抗不饱和	X ₀	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
Short-circuit ratio 短路比	K _{cc}	0.4630	0.4878	0.5263	0.6494	0.4049	0.4292	0.4484	0.4673

Short-circuit transient time constant (sec.) 瞬变时间常数 (秒)	T' _d	0.115							
Subtransient time constant (sec.) 超瞬变时间常数 (秒。)	T'' _d	0.015							
Open circuit time constant (sec.) 开路时间常数	T' _{do}	3.6							
Armature time constant (sec.) 电枢时间常数	T _a	0.038							
Stator Winding Resistance (20°C) 定子绕组电阻(20°C)	ohm	0.0015							
Rotor Winding Resistance (20°C) 转子绕组电阻(20°C)	ohm	2.47							
Exciter Stator Resistance (20°C) 励磁机定子电阻(20°C)	ohm	17.5							
Exciter Rotor Phase resistance 励磁机转子相电阻	ohm	0.063							
No load excitation current 空载励磁电流	io (A)	0.6	0.63	0.71	0.65	0.56	0.6	0.62	0.63
Full load excitation current 满载励磁电流	ic(A)	2.6	2.7	2.8	2.7	2.7	2.7	2.8	2.8
Cooling air requirement 空气冷却要求	m ³ /sec	2.18m ³ /s 4619cfm				2.63m ³ /s 5573cfm			

Mechanical Characteristic


Configuration 结构	Single Bearing 单轴承	Double Bearing 双轴承
Type of Construction 结构形式	B2-SAE	IM B34
Total Weight - kgs 总重量-公斤	2721	2700
Weight wound stator - kgs 定子重量-公斤	1350	1350
Weight wound rotor - kgs 转子重量-公斤	1167	1129
Inertia (J) [kgm ²] 转动惯量 (J) [kgm ²]	29.279kgm ²	28.7543kgm ²
Drive end bearing / Lubrication 驱动端轴承/润滑		BALL.6224-2RS(ISO)
Non-drive end bearing / Lubrication 非驱动端轴承/润滑	BALL.6317-2RS(ISO)	BALL.6317-2RS(ISO)
Packing crate size 包装尺寸 (cm)	186X97X133	195X97X133

Winding 312 / 0.8 Power Factor

RATINGS





温升等级	F级温升 - 105/40°C	H级温升 - 125/40°C	备载 - 150/40°C	备载 - 163/27°C
50 Hz	星形 (V)	380 400 415 440	380 400 415 440	380 400 415 440
	三角形 (V)	220 230 240 254	220 230 240 254	220 230 240 254
视在功率 (kVA)	1091 1146 1146 1040	1190 1250 1250 1135	1225 1288 1288 1170	1250 1313 1313 1190
有功功率 (kW)	873 917 917 832	952 1000 1000 908	80 1030 1030 936	1000 1050 1050 952
效率 (%)	95.1 95.1 95.1 95.3	94.9 94.9 95.0 95.2	94.8 94.8 94.9 95.2	94.7 94.7 94.8 95.2
有功功率输入	918 964 864 873	1003 1054 1053 954	1034 1087 1086 983	1056 1109 1108 1000
60 Hz	星形 (V)	416 440 460 480	416 440 460 480	416 440 460 480
	三角形 (V)	240 254 266 277	240 254 266 277	240 254 266 277
视在功率 (kVA)	1200 1270 1328 1386	1310 1386 1449 1513	1354 1432 1497 1563	1369 1448 1514 1580
有功功率 (kW)	960 1016 1062 1109	1048 1109 1159 1210	1083 1146 1198 1250	1095 1158 1211 1264
效率 (%)	95.1 95.1 95.1 95.1	94.9 94.9 95.0 95.0	94.8 94.9 94.9 94.9	94.8 94.8 94.9 94.9
有功功率输入	1009 1068 1117 1166	1104 1168 1220 1274	1143 1207 1262 1318	1155 1222 1276 1332

DIMENSIONS

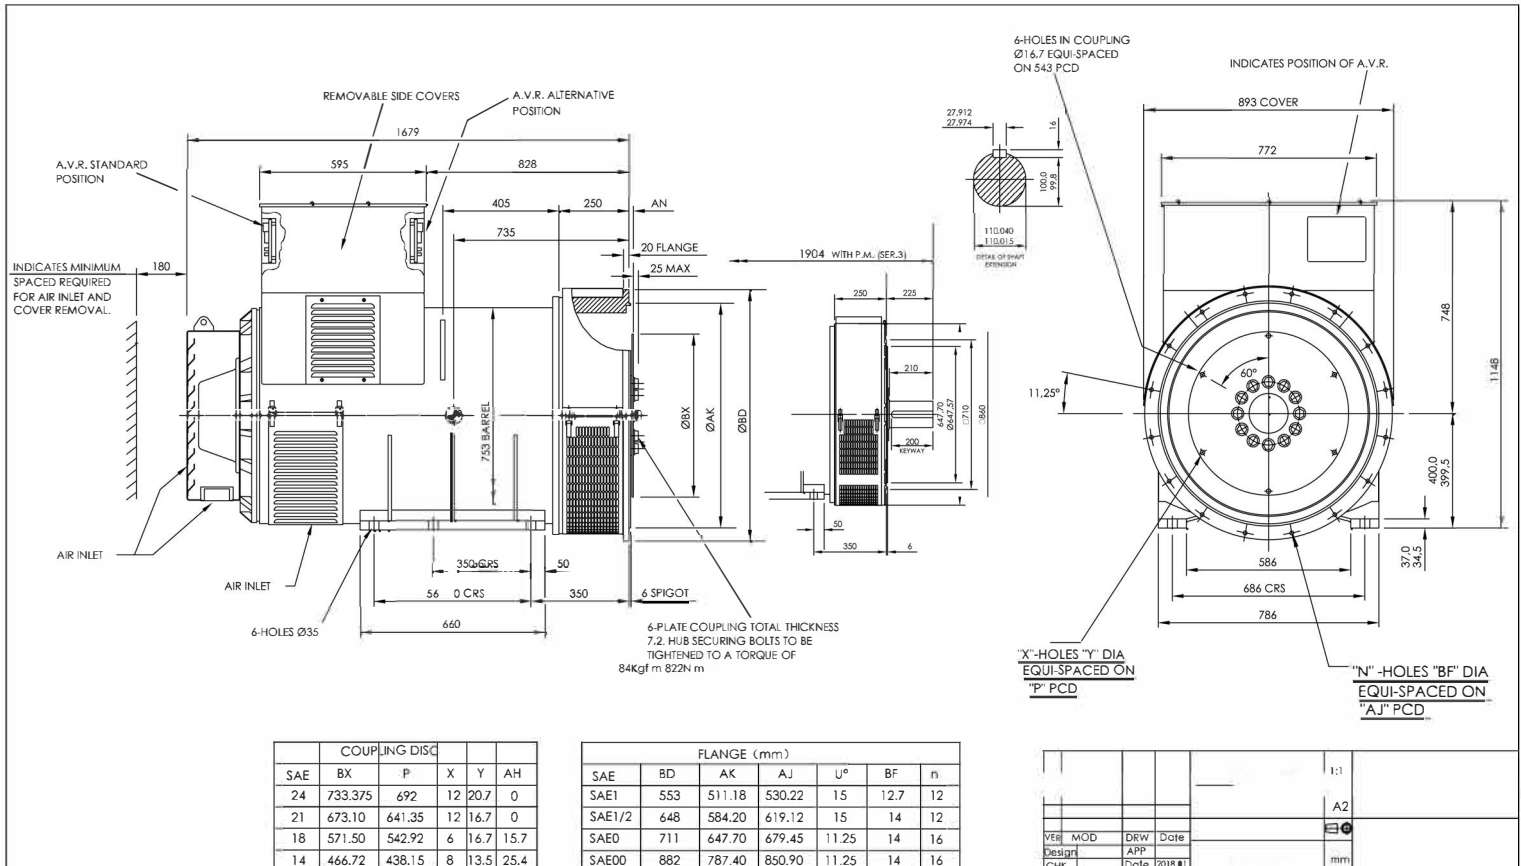





**50
Hz**

THREE PHASE EFFICIENCY CURVES

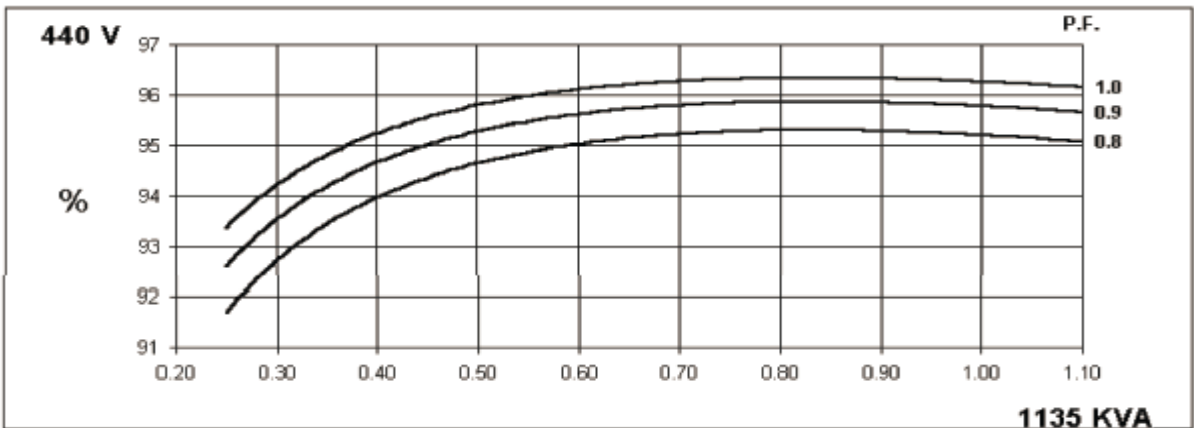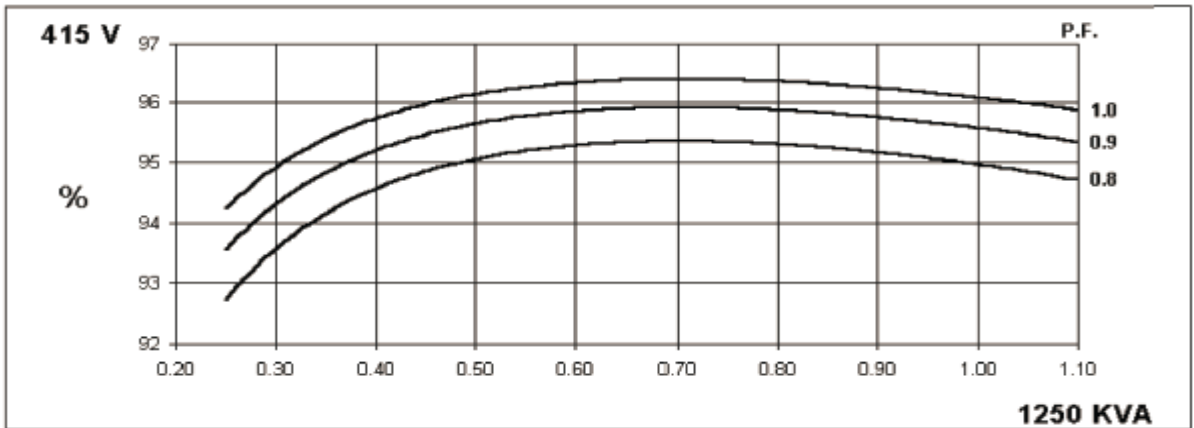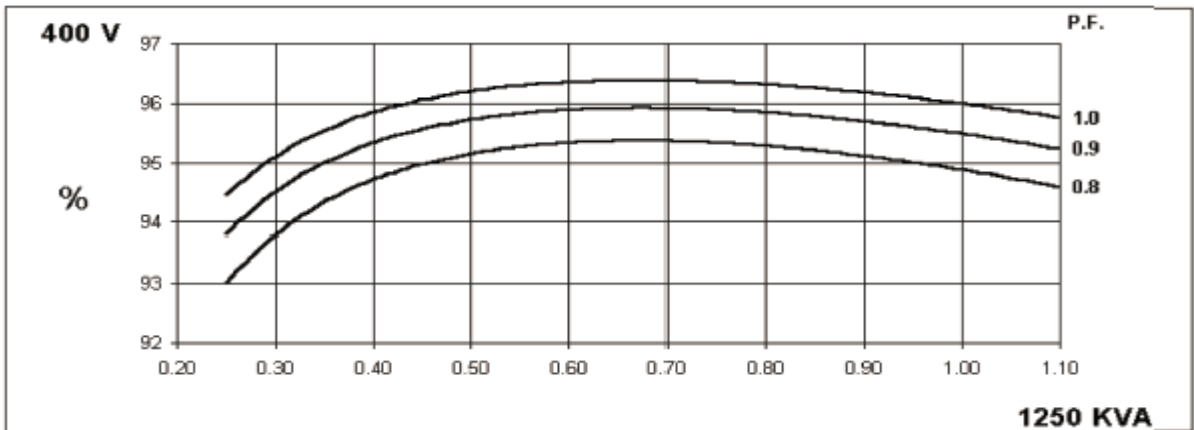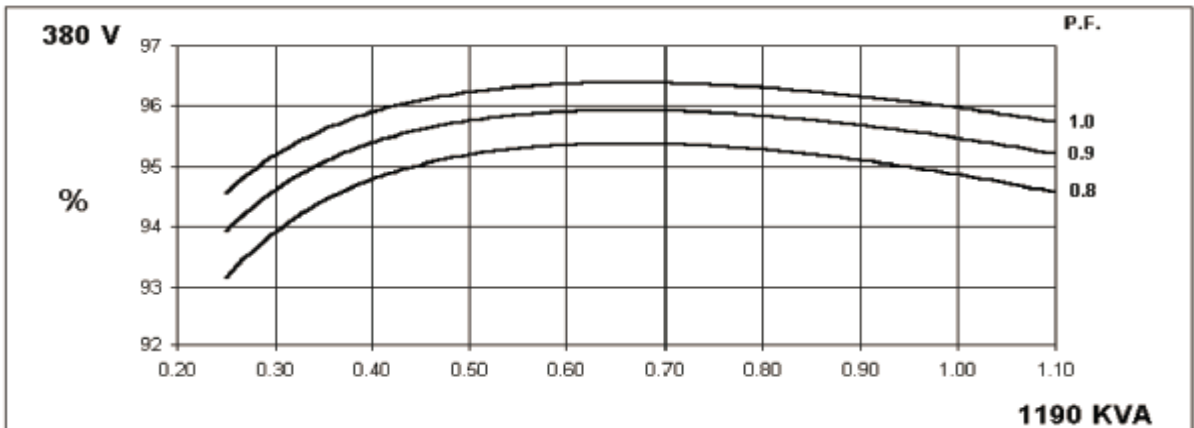


**60
Hz**

THREE PHASE EFFICIENCY CURVES

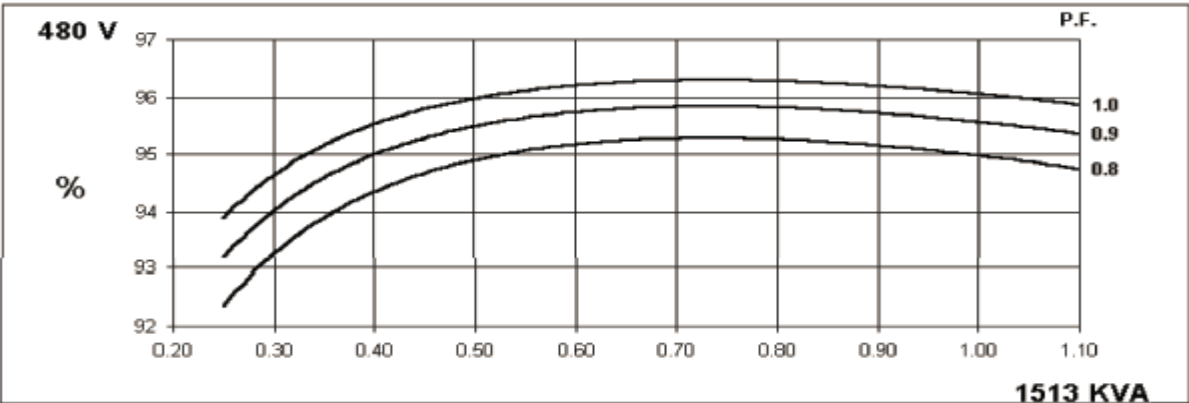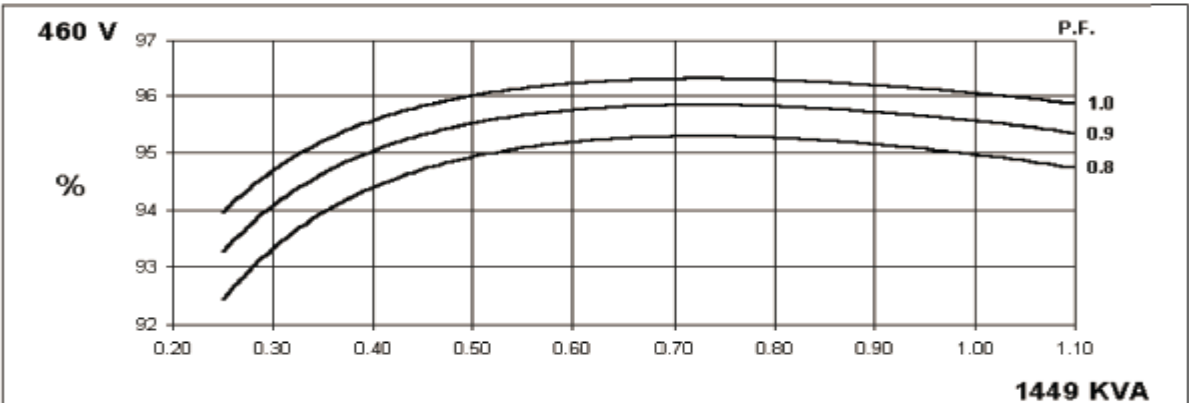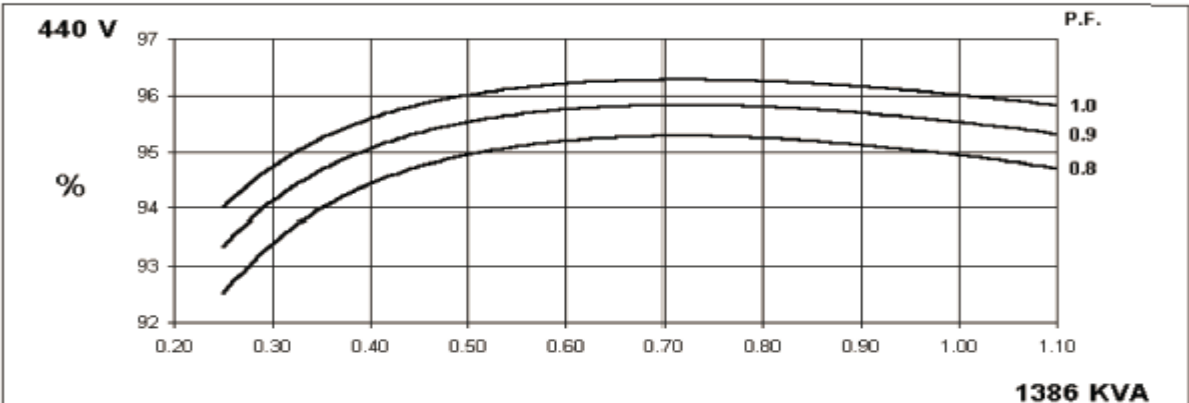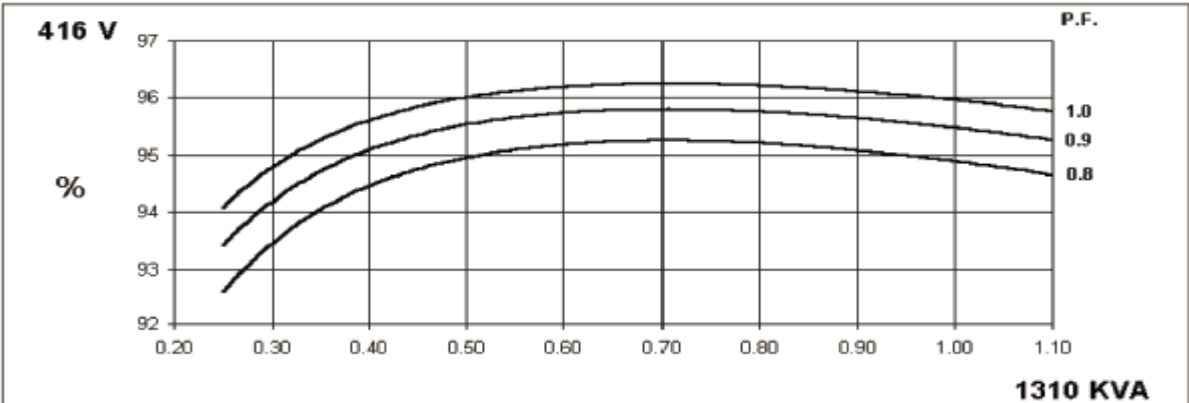


**Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed
Based on star (wye) connection.**

**50
Hz**

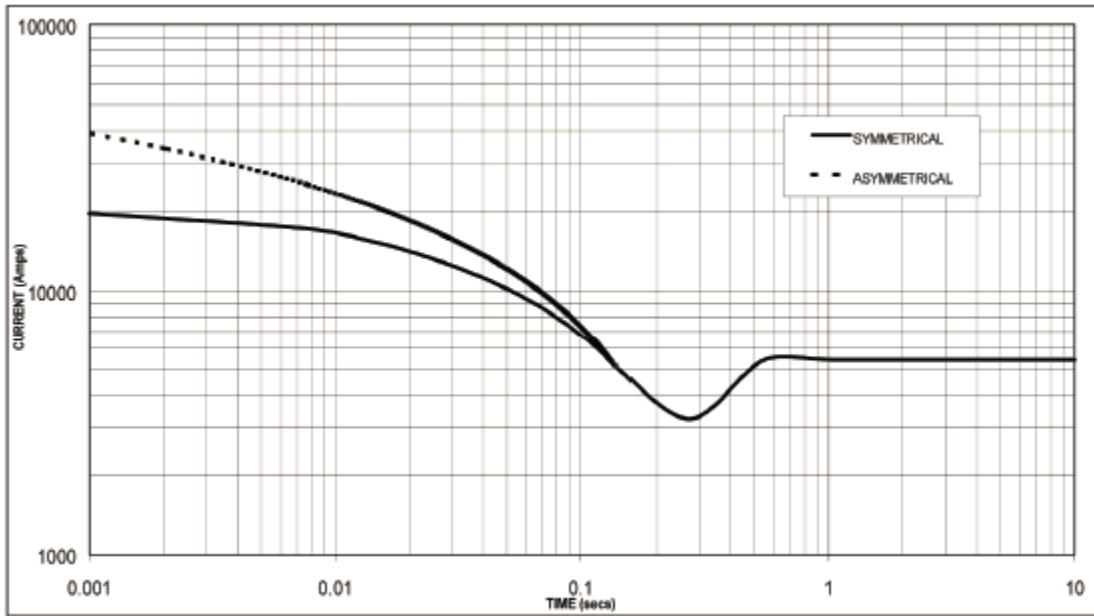

Sustained Short Circuit = 5400 Amps

**60
Hz**

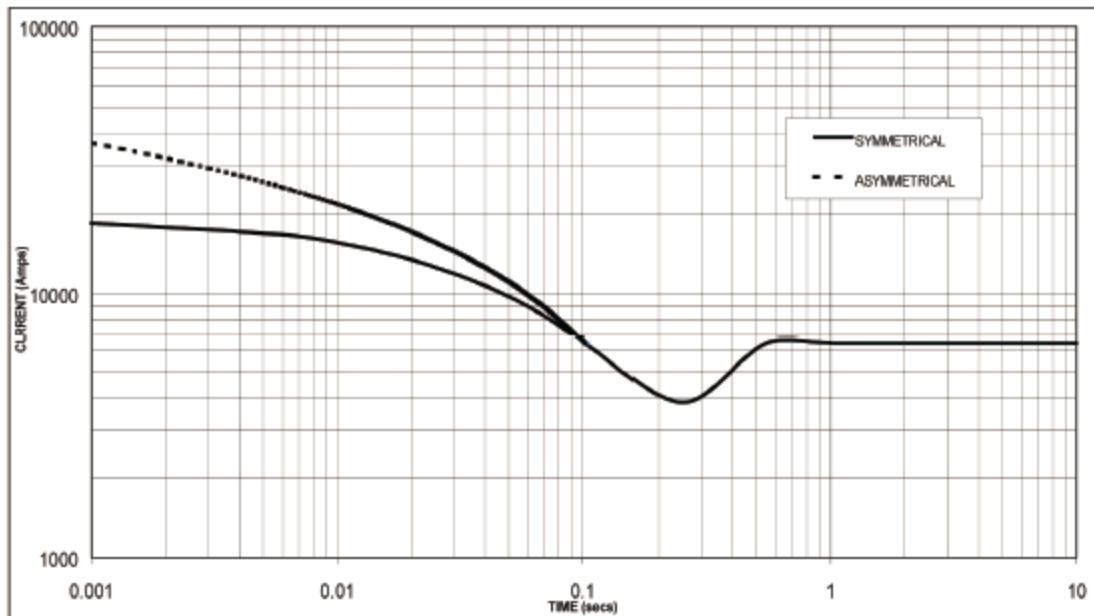

Sustained Short Circuit = 6390 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	x 1.00	416v	x 1.00
400v	x 1.05	440v	x 1.06
415v	x 1.09	460v	x 1.10
440v	x 1.16	480v	x 1.15

The sustained current value is constant irrespective of voltage level

Note 2


The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines.

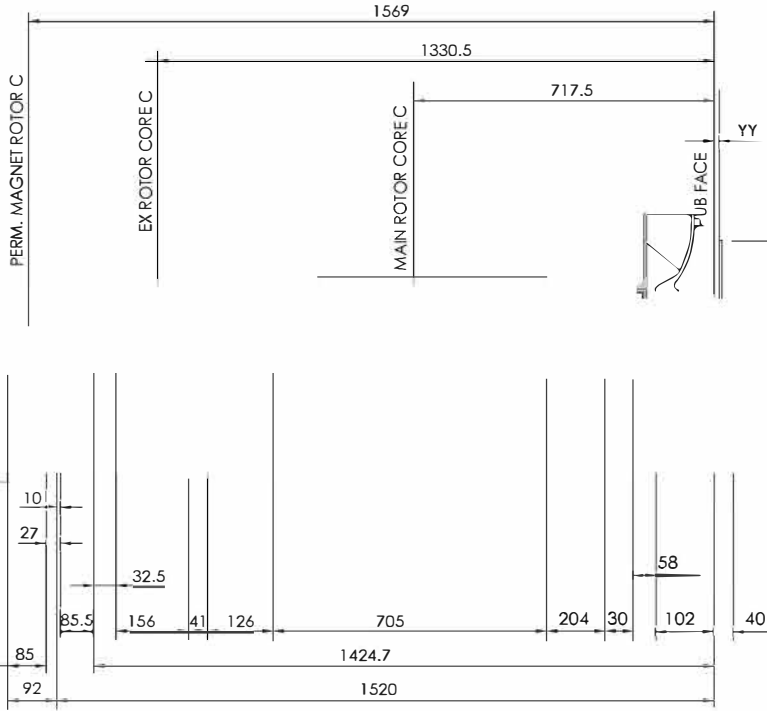

COMPONENT	Wt kg	J kgm ²
EX. ROTOR	51.6	0,859
MAIN ROTOR	844.191	26.0906
FAN	34.547	1.7988
SHAFT	204.355	0,5919
HUB	50.325	0,6766
P.M.EX.ROTOR	6.97	0.019
P.M. STUB SHAFT	0.929	0,0003
TOTAL	1192.917	30.0362

COUPLING SAE No	COUPLING DIMEN's		COUPLING ASSEMBLY WEIGHT kg	COUPLING DISC J kgm ²
	XX	YY		
18	572	16	24.4	0.535
21	673	0	24.25	1.053
24	733	0	28	1.602

VER	MOD	DRW	Date	
Design		APP		
CHK		Date	2018.01	mm

