



M2300

CONT 2080 kVA



THREE-PHASE SYNCHRONOUS GENERATOR

Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature 环境温度	40 °C	Method of Cooling 冷却方式	Air cooling 风冷
Temperature Rise 温升	125 °C	Direction of Rotation 旋转方向	Clockwise 顺时针
Insulation Class 绝缘等级	H	Maximum Over-speed 最高转速	2250r/min
Power Factor 功率因数	0.8	Degree of Protection / Enclosure 防护等级	IP23
Excitation 励磁方式	Brushless 无刷	Altitude 海拔	1000m
Winding Pitch 绕组节距	2/3	Stator winding 定子绕组	双层叠绕绕组 DLL
Pole 极数	4	Number of Terminal 终端数量	6
Duty 工作制	S1- Continuous	Rotor 转子	With damping cage 带阻尼
Waveform 电话干扰因数	TIF<50		THF<2%
Waveform distortion 波形畸变率	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N		
Radio interference 无线电干扰	Noload<1.5%,Non-distorting balanced linear load<5%		
AVR MODEL AVR型号	Standard 标配	Selection 选配	
	MX341B	MX321	PMG MX341B MX321
Voltage Regulation - in steady state condition 电压调节	±0.5	±0.5	±0.5 ±0.5
Short Circuit Current Capacity 短路电流容量	6850A		

Electrical Characteristic

Frequency 频率	Hz	50				60			
		380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage (series star)电压 Y	V	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Voltage (parallel star)电压 YY	V	220	230	240	254	240	254	266	277
Voltage (series delta)电压 Δ	V	2020	2080	2080	2040	2345	2500	2550	2600
Rated power at Class H (125 °C) temperature rise 额定功率在H(125 °C)温升	kVA	1616	1664	1664	1632	1876	2000	2040	2080
Efficiency at Class H (P.F.=0.8)绝缘等级H (P.F.=0.8)效率	4/4%	96.0	96	96.1	96.3	95.9	95.9	96	96.1
	3/4%	96.6	96.6	96.7	96.8	96.4	96.4	96.5	96.6
	2/4%	96.4	96.4	96.4	96.3	96.2	96.2	96.2	96.2
Efficiency at Class H (P.F.=1.0)绝缘等级H (P.F.=1.0)效率	4/4%	96.8	96.9	97	97.1	96.8	96.8	96.9	96.9
	3/4%	97.3	97.4	97.4	97.4	97.2	97.2	97.3	97.3
	2/4%	97.2	97.2	97.2	97.2	97	97	97	97

Reactances (%) at Class H 绝缘等级H考核时的电抗

		2.93	2.73	2.53	2.21	3.55	3.38	3.16	2.96
Direct axis synchronous reactance unsaturated 直轴同步电抗	X _d	0.18	0.17	0.15	0.13	0.21	0.2	0.19	0.18
Direct axis transient reactance saturated 直轴瞬态电抗	X' _d	0.13	0.12	0.11	0.1	0.16	0.15	0.14	0.13
Direct axis subtransient reactance saturated 直轴瞬变电抗	X'' _d	1.89	1.75	1.63	1.42	2.28	2.18	2.03	1.9
Quadrature axis synchronous reactance unsaturated 交轴同步电抗	X _q	0.26	0.25	0.23	0.2	0.32	0.31	0.29	0.27
Quadrature axis subtransient reactance saturated 交轴起始瞬态电抗	X'' _q	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.03
Leakage reactance 漏抗	X _l	0.19	0.17	0.16	0.14	0.23	0.22	0.2	0.19
Negative sequence reactance saturated 负序电抗饱和	X ₂	0.02	0.02	0.02	0.02	0.03	0.03	0.02	0.02
Zero sequence reactance unsaturated 零序电抗不饱和	X ₀	0.3413	0.3663	0.3953	0.4525	0.2817	0.2959	0.3165	0.3378
Short-circuit ratio 短路比	K _{cc}								

Short-circuit transient time constant (sec.) 瞬变时间常数 (秒)	T' _d	0.154							
Subtransient time constant (sec.) 超瞬变时间常数 (秒。)	T'' _d	0.02							
Open circuit time constant (sec.) 开路时间常数	T' _{do}	2.54							
Armature time constant (sec.) 电枢时间常数	T _a	0.02							
Stator Winding Resistance (20°C) 定子绕组电阻(20°C)	ohm	0.00076							
Rotor Winding Resistance (20°C) 转子绕组电阻(20°C)	ohm	1.77							
Exciter Stator Resistance (20°C) 励磁机定子电阻(20°C)	ohm	17.5							
Exciter Rotor Phase resistance 励磁机转子相电阻	ohm	0.063							
No load excitation current 空载励磁电流	io (A)	0.6	0.63	0.71	0.65	0.56	0.6	0.62	0.63
Full load excitation current 满载励磁电流	ic(A)	3.2	3.2	3.6	3.2	3.4	3.3	3.4	3.5
Cooling air requirement 空气冷却要求	m ³ /sec	2.69m ³ /s 5200cfm				3.45m ³ /s 7300cfm			





Mechanical Characteristic

Configuration 结构	Single Bearing 单轴承		Double Bearing 双轴承	
	B2-SAE		IM B34	
Type of Construction 结构形式	3830		3800	
Total Weight - kgs 总重量-公斤	1905		1905	
Weight wound stator - kgs 定子重量-公斤	1609		1565	
Weight wound rotor - kgs 转子重量-公斤	49.3409kgm ²		48.424kgm ²	
Inertia (J) [kgm ²] 转动惯量 (J) [kgm ²]	BALL.6228-2RS(ISO)		BALL.6228-2RS(ISO)	
Drive end bearing / Lubrication 驱动端轴承/润滑	BALL.6319-2RS(ISO)		BALL.6319-2RS(ISO)	
Non-drive end bearing / Lubrication 非驱动端轴承/润滑	220X101X159		230X101X159	
Packing crate size 包装尺寸 (cm)				

50
Hz

Winding 312





THREE PHASE EFFICIENCY CURVES

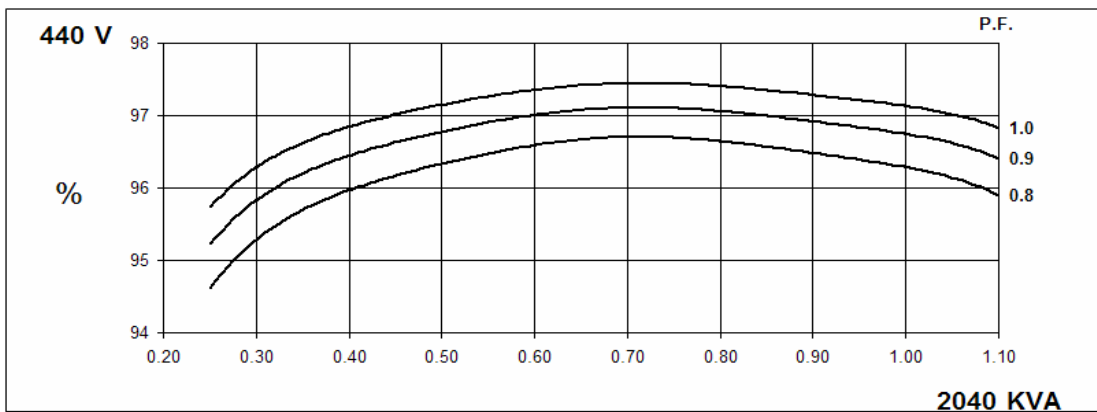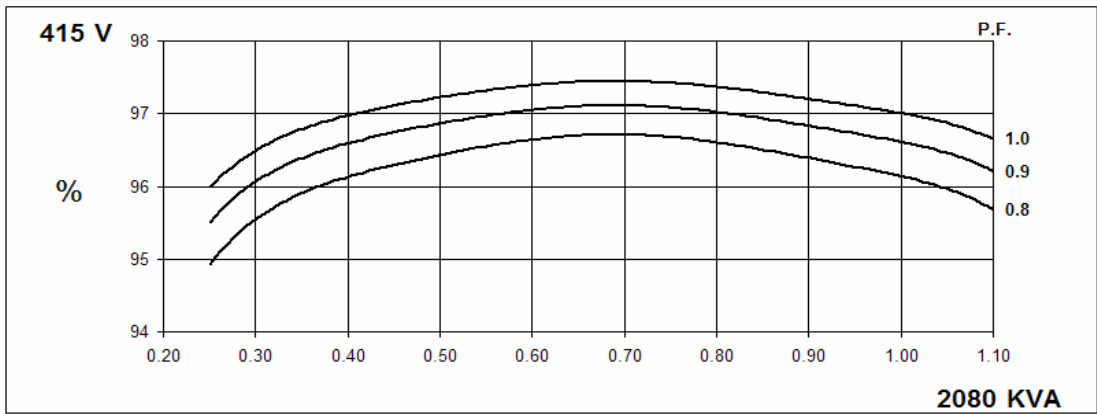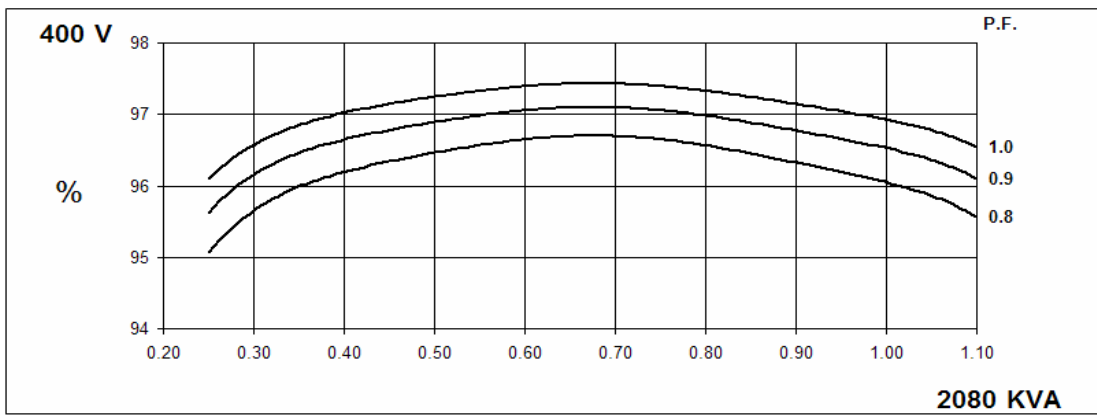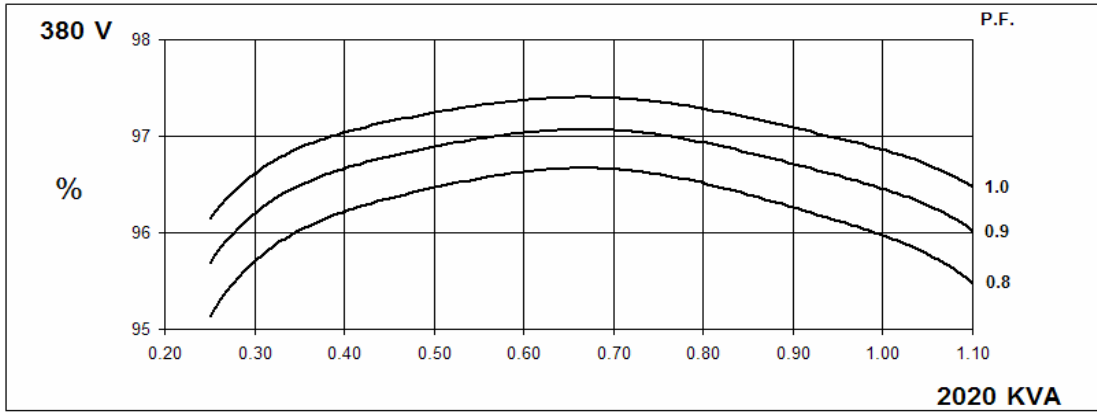

60
Hz

Winding 312


THREE PHASE EFFICIENCY CURVES

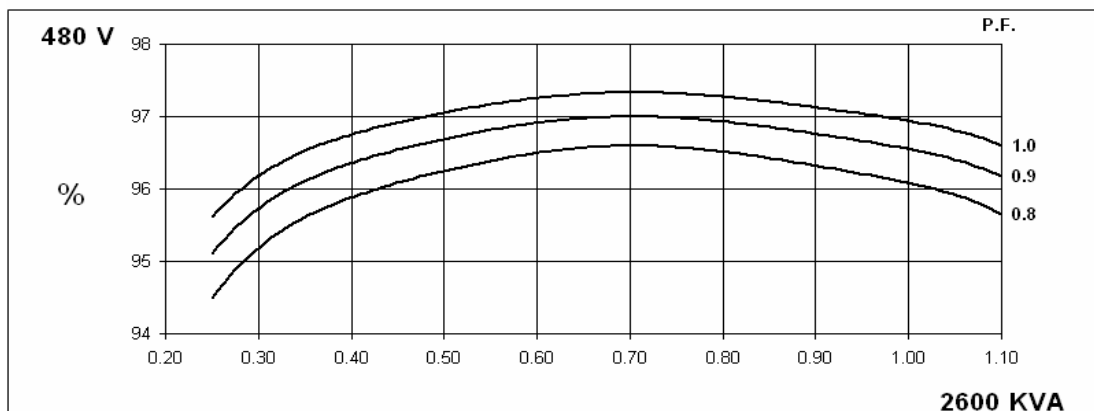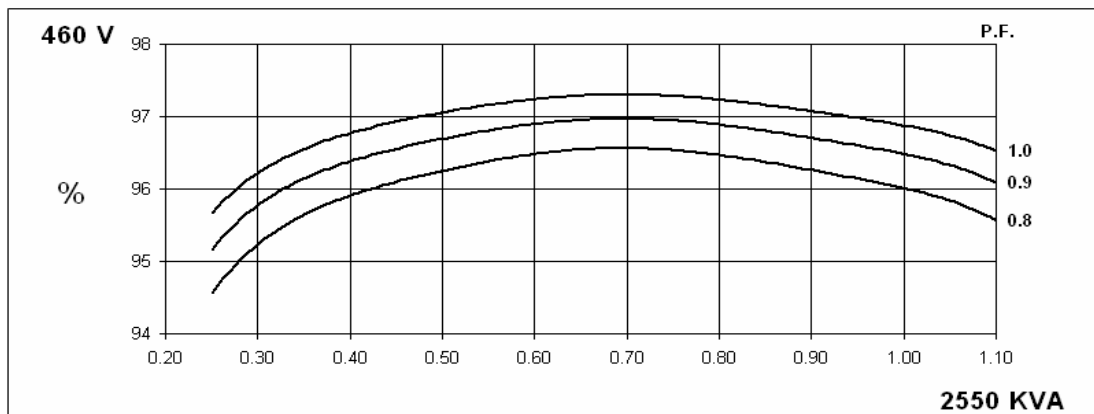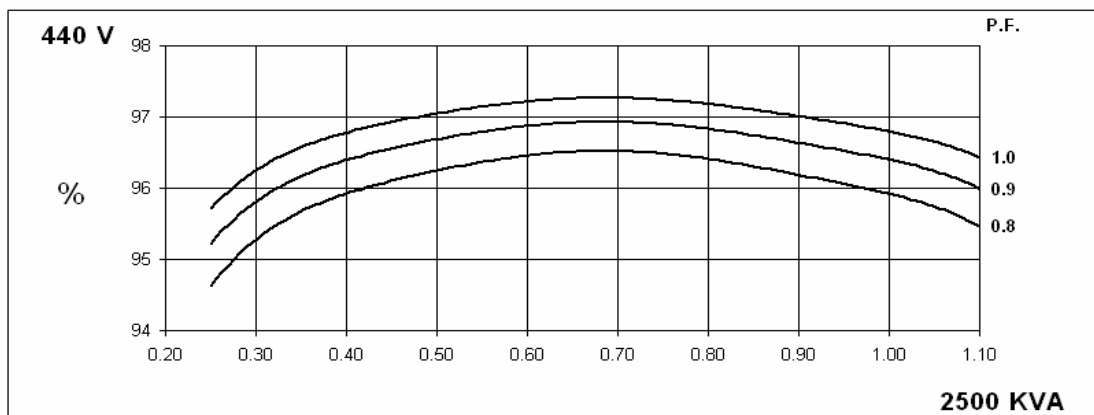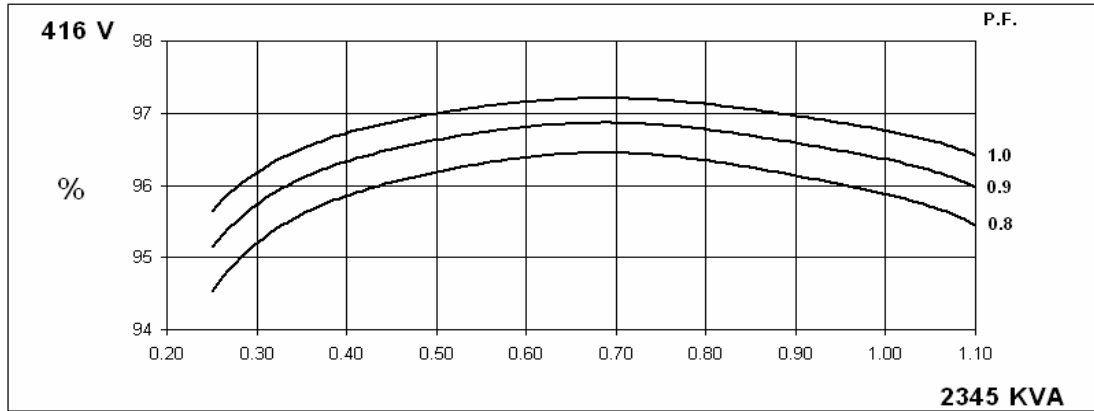

Winding 312


Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed Based on star (wye) connection.

50
Hz

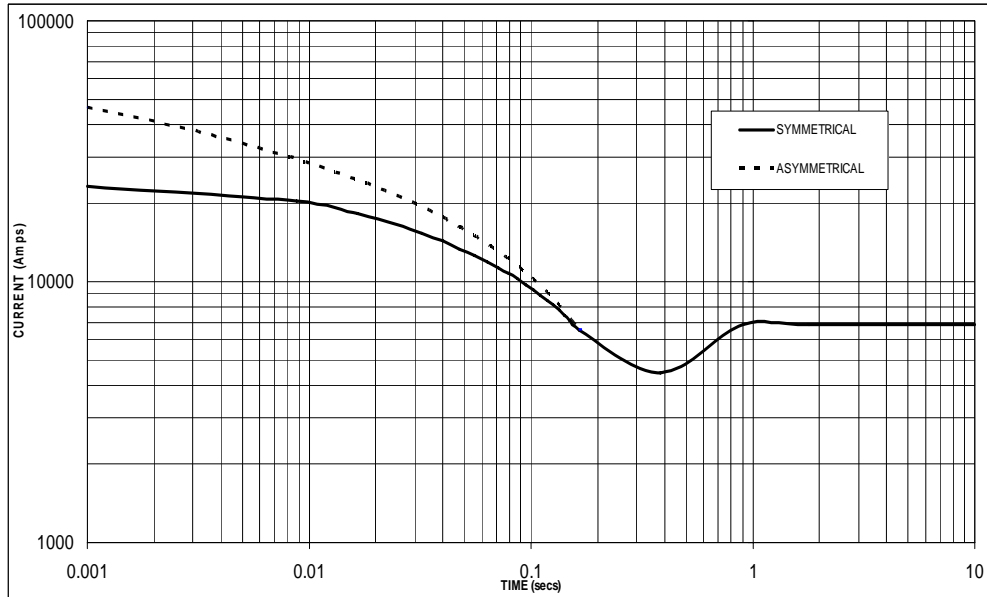

Sustained Short Circuit = 6,850 Amps

60
Hz

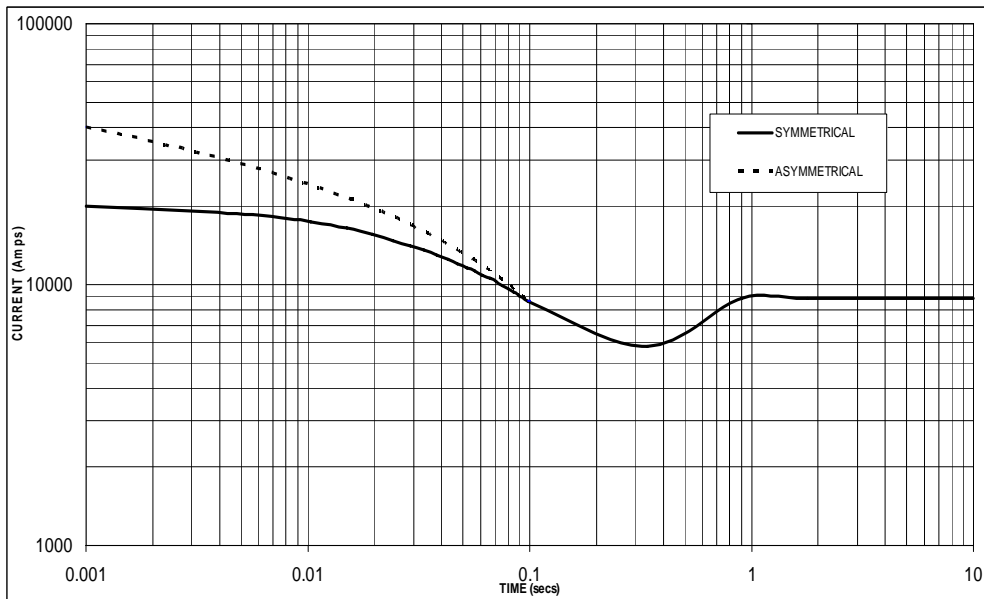

Sustained Short Circuit = 8,900 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	x 1.00	416v	x 1.00
400v	x 1.05	440v	x 1.06
415v	x 1.09	460v	x 1.10
440v	x 1.16	480v	x 1.15

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines.

